

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
12 September 2003 (12.09.2003)


PCT

(10) International Publication Number  
WO 03/074962 A1

- (51) International Patent Class.: F41H 1/08, John [GB/GB]; 50 Laburnum Avenue, Newbold Verdon, Leicestershire LE9 9LQ (GB).  
A42B 3/06, A42C 2/00, B29C 7/034
- (21) International Application Number: PCT/GB03/00913 (74) Agent: HANSON, William, Bennett; JY & GW Johnson, Kingsbourne House, 229-231 High Holborn, London WC1V 7DP (GB).
- (22) International Filing Date: 4 March 2003 (04.03.2003)
- (25) Filing Language: English (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (26) Publication Language: English
- (30) Priority Data: 0205267.8 6 March 2002 (06.03.2002) GB (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
- (71) Applicant (for all designated States except US): NP AEROSPACE LIMITED [GB/GB]; 473 Foleshill Road, Coventry CV6 5AQ (GB).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): CHEESE, Martin,

[Continued on next page]

(54) Title: METHOD OF MAKING A HELMET

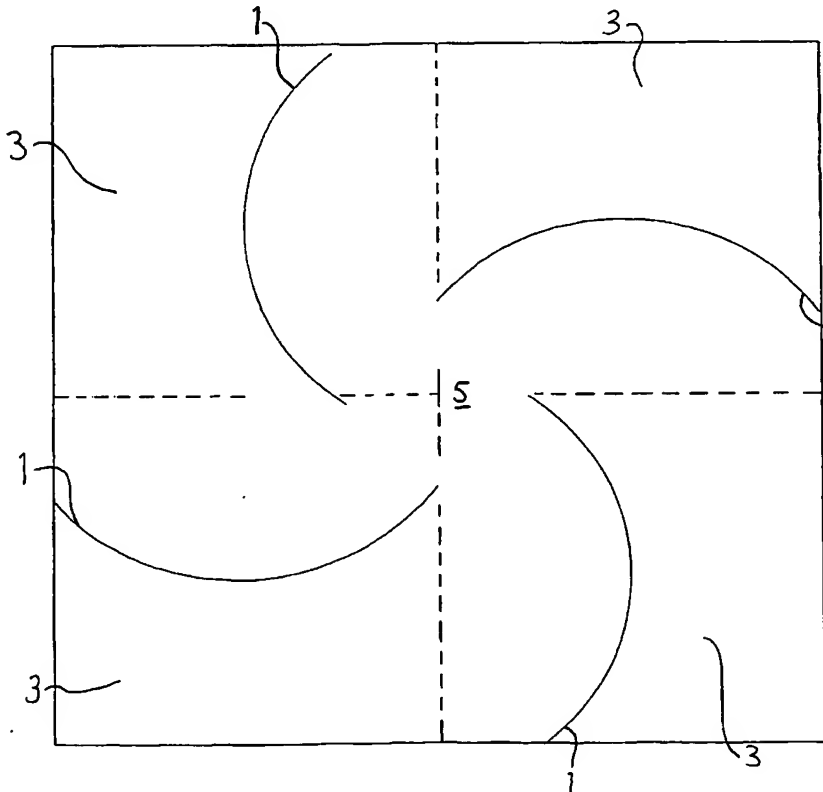

(57) Abstract: A method of making a helmet comprises the steps of cutting a plurality of substantially rectangular, preferably square, blanks from a sheet of resin-impregnated fabric, making curved cuts (1) in each blank to form a crown portion (5) and lobe portions (3) therefrom, arranging a stack of said sheets into a helmet preform such that the lobe portions of any blank partially overlap adjacent lobe portions of the same blank, and molding the helmet from the preform.



WO 03/074962 A1



ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declaration under Rule 4.17:**

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM,

KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

**Published:**

- with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

## METHOD OF MAKING A HELMET

### Background to the Invention

This invention relates to a method of making a ballistic protective helmet and to a  
5 helmet made by the method.

Composite helmets have conventionally been made from strong fabric impregnated with a phenolic resin and cut into a hexagonal or octagonal shape called a pinwheel. Straight radial cuts are made such that the pinwheel comprises a crown from which  
10 radiates a plurality of straight-edged petals. A number of pinwheels are superposed by placing the crowns of the pinwheels on top of one another so that their petals are in a staggered relationship. The preform which results is placed in a heated mold, comprising matched steel dies, in a compression press and is subjected to heat and pressure to form the helmet.

15

In making the pinwheels, much fabric is cut to waste. This is a very significant disadvantage in view of the fact that the preferred fabrics comprise aramid fibers, such as "Kevlar" ® sold by DuPont, and are expensive. At present there is also a world shortage, particularly of the higher grades (i.e. the strongest) aramid fibers.

20

The speed of the cutting procedure described above is limited by the fact that many cuts have to be made in different directions.

### Summary of the Invention

25 With the aim of significantly reducing waste relative to the conventional method and at the same time producing a stronger helmet, the present invention provides a method of making a helmet comprising the steps of cutting a plurality of substantially rectangular blanks from a sheet of fabric, making cuts in each blank to form a crown portion and lobe portions therefrom, arranging a stack of said sheets into a helmet preform such  
30 that the lobe portions of any blank partially overlap adjacent lobe portions of the same blank, and molding the helmet from the preform.

Rectangular blanks tessellate, thus wasting no material at all in the cutting steps, and speeding up the cutting steps as compared with the known blanks. Starting from a sheet of material with a straight edge, only three cuts are required to form four square blanks.

5

Preferably, the method includes the use of fabric previously impregnated with resin, preferably phenolic resin. We prefer to use fabric to which the resin has been added as an adhesive film. Alternatively, the resin could be added during the molding step.

- 10 Most preferably, the rectangular blanks are substantially square. The cutting process can be speeded up even further by forming only one cut extending inwardly from each side of each blank, thus forming only four lobe portions from the blank.

15 Preferably, the cuts in the blank are curved. In particular, the cuts preferably start at a position on each side of the blank which divides the side into two fractions of between 0.3/0.7 and 0.45/0.55. Each cut then preferably follows an arc of a circle towards that other side of the blank to which the cut is already closest. The cuts preferably do not extend further than any perpendicular bisector of any side of the blank: in a particular embodiment, the cuts terminate at the first perpendicular bisector reached.

20

We have discovered that by forming such curved cuts, the arranging step, which preferably comprises pushing the stack of blanks into a substantially hemispherical cavity, requires very little force as the lobe portions of each blank close up and partially overlap somewhat like the iris of a camera.

25

Preferably, the centers of the blanks in the stack are aligned and there is an angular offset between adjacent blanks. The invention makes it possible to use fewer blanks than the prior art process. Advantageously, the blanks are of more than one size, smaller blanks providing additional layers in the crown region of the helmet.

30

The blanks may have a thickness between 0.3 and 1 mm.

Preferably, the molding step involves the application of heat as well as pressure. This causes a flow of some of the resin down towards the rim of the helmet. However, the curved cuts divert the flow of resin to a horizontal direction around the helmet and the final distribution of resin is more even than in prior art helmets.

5

Preferably, the molded helmet is trimmed in order to form a helmet with a rim that lies substantially in one plane.

The invention also provides a helmet formed from a stack of fibrous blanks impregnated with resin, each blank comprising a trimmed rectangle and each blank  
10 having four curved cuts extending inwardly, one from each side of the rectangle.

#### Brief Description of the Drawings

In order that the invention may be more readily understood, reference will now be  
15 made, by way of example only, to the accompanying drawings, in which:

Figure 1 shows a large cut blank for use in making a helmet according to an embodiment of the invention; and

20 Figure 2 shows a small cut blank for use in making the same helmet.

#### Detailed Description of the Preferred Embodiments

Figure 1 shows a square blank of side 0.5 m cut from a strong woven fabric that has been impregnated with phenolic resin. Positions on the blank will be considered as  
25 Cartesian coordinates, with the bottom left-hand corner of the blank at the origin and the length of each side being one unit. Four cuts 1 are formed, starting from the points (0.375, 0), (1, 0.375), (0.625, 1) and (0, 0.625). The cuts are arcs of circles centered about the points (0.6875, 0.25), (0.75, 0.6875), (0.3125, 0.75) and (0.25, 0.3125) respectively. The cuts terminate at the points (0.375, 0.5), (0.5, 0.375), (0.625, 0.5) and  
30 (0.5, 0.625) respectively, i.e. at the first perpendicular bisector of any side of the blank reached (shown dotted).

This divides the blank into four lobe portions 3 and a crown portion 5.

Figure 2 shows a square blank of side 0.25 m, in which four cuts are made, similar to those of the blank of Figure 1 but shorter.

5 A stack of blanks alternating between the blanks of Figure 1 and those of Figure 2, for example comprising five or seven of each type, is arranged in a stack with the centers of the blanks aligned. Each subsequent blank of the same type is rotated by a predetermined angle with respect to the previous blank. The predetermined angle should not be close to  $90^\circ$  or  $180^\circ$ . For evenness of material it is preferred that the product of the predetermined angle and the number of blanks of a given type in the  
10 stack is approximately  $360^\circ$  or a multiple of  $360^\circ$ . In a particular example, each blank is rotated by  $55^\circ$  with respect to the previous blank.

In order to form a generally hemispherical helmet preform, the stack of blanks is pushed into a concave cavity having a part-spherical surface. In doing so, the lobe  
15 portions 3 ride over the adjacent lobe portions of the same blank. This is achieved with remarkably little pushing force. The smaller blanks of Figure 2 provide additional layers at the crown portion of the preform, whilst the overlapping lobe portions 3 of the larger blanks of Figure 1 provide additional layers nearer the rim of the preform.

20 The helmet preform may be preheated and is then taken to a mold comprising a convex lower molding tool and a concave upper molding tool and is formed into a desired helmet shape by pressing the tools together and heating to a temperature of approximately  $140$  to  $160^\circ\text{C}$  for about 10 to 15 minutes. The curved cuts 1 in each blank cause the resin to flow around the helmet horizontally thus giving a sufficiently  
25 even final distribution of resin.

It will be appreciated that the square shape of the blanks causes unwanted triangular portions thereof to project from the side of the helmet. However, the unwanted portions are remarkably small and can easily be trimmed from the helmet after  
30 molding. Subsequently, the helmet has holes drilled therein and is painted and fitted with a cradle.

The resistance to impact of helmets according to the invention is more predictable than prior art helmets, because the amount by which adjacent lobes overlap is predictable. The V50 value, that is the velocity of projectiles stopped 50% of the time, by the helmet, is higher than prior art helmets at the same given weight.

5

Whilst the figures show two particular embodiments of resin-impregnated blanks, it should be understood that different configurations also fall within the scope of the appended claims. In particular, the size of the crown portion 5 of the blank can be made smaller, for a taller, narrower helmet, or larger, for a wider, shallower helmet. In one example, as well as the blanks shown in Figures 1 and 2, further square blanks of side 0.2 m are also used and the blanks are stacked in a sequence comprising one blank of each of the three sizes, which sequence is repeated several times. Four or more differently sized blanks could alternatively be used in making a helmet according to the invention.

15

CLAIMS

1. A method of making a helmet comprising the steps of cutting a plurality of substantially rectangular blanks from a sheet of fabric, making cuts in each blank to  
5 form a crown portion and lobe portions therefrom, arranging a stack of said sheets into a helmet preform such that the lobe portions of any blank partially overlap adjacent lobe portions of the same blank, and molding the helmet from the preform.
2. A method according to claim 1, wherein the sheet of fabric has previously been  
10 impregnated with resin.
3. A method according to claim 2, wherein the resin is phenolic resin.
4. A method according to claim 1, 2 or 3, wherein the rectangular blanks are  
15 substantially square.
5. A method according to any preceding claim, wherein the step of making cuts comprises forming only one cut extending inwardly from each side of each blank, thus forming only four lobe portions from the blank.  
20
6. A method according to any preceding claim, wherein the cuts in each blank are curved.
7. A method according to any preceding claim, wherein the cuts start at a position  
25 on each side of the blank which divides the side into two fractions of between 0.3/0.7 and 0.45/0.55.
8. A method according to claim 7, wherein each cut then follows an arc of a circle towards that other side of the blank to which the cut is already closest.
- 30 9. A method according to claim 8, wherein the cuts do not extend further than any perpendicular bisector of any side of the blank.



10. A method according to claim 9, wherein each cut terminates at the first perpendicular bisector reached.
11. A method according to any preceding claim, wherein the arranging step  
5 comprises pushing the stack of blanks into a substantially hemispherical cavity.
12. A method according to any preceding claim, wherein the centers of the blanks in the stack are aligned and there is an angular offset between adjacent blanks.
- 10 13. A method according to any preceding claim, wherein the blanks are of more than one size.
14. A method according to any preceding claim, wherein the blanks have a thickness between 0.3 and 1 mm.
- 15 15. A method according to any preceding claim, wherein the molding step involves the application of heat as well as pressure.
16. A method according to any preceding claim, wherein the molded helmet is  
20 trimmed in order to form a helmet with a rim that lies substantially in one plane.
17. A helmet formed from a stack of fibrous blanks impregnated with resin, each blank comprising a trimmed rectangle and each blank having four curved cuts extending inwardly, one from each side of the rectangle.

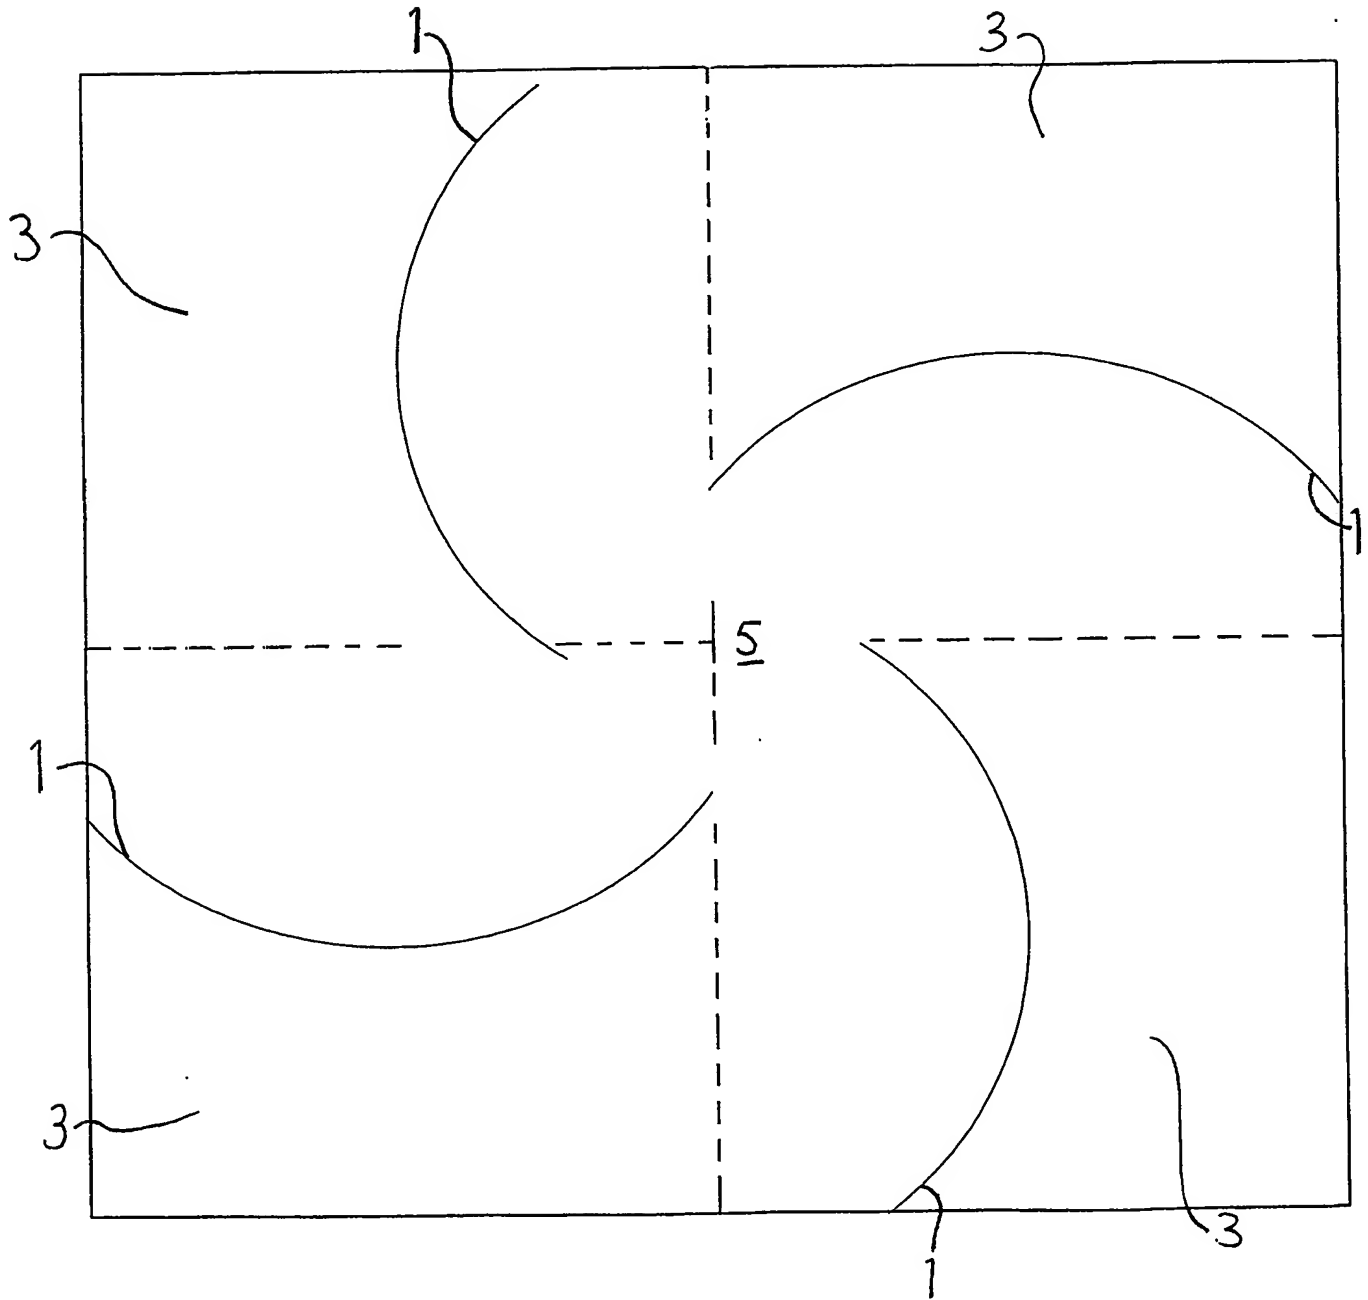


Fig.1

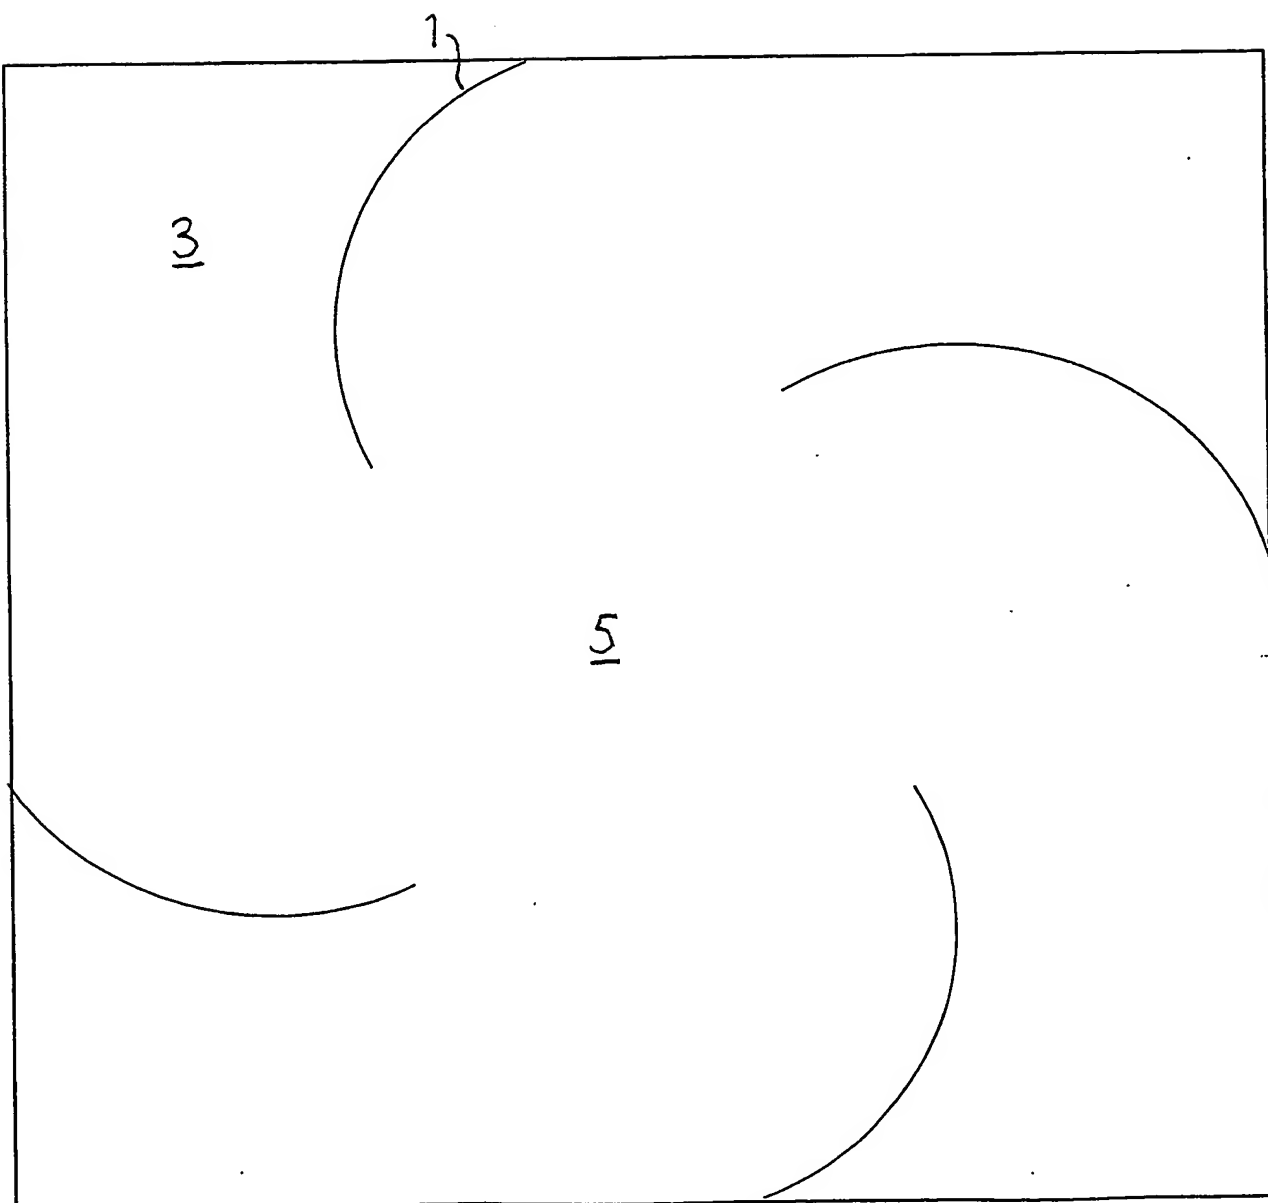


Fig. 2

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB 03/00913

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 F41H1/08 A42B3/06 A42C2/00 B29C70/34

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 F41H A42B A42C B29C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 778 638 A (WHITE MILTON R) 18 October 1988 (1988-10-18) column 2, line 35 -column 3, line 42; figures 1-6 column 4, line 28 - line 37 ---	1-5, 11-17
A	US 4 990 207 A (SAKAI HIDEO ET AL) 5 February 1991 (1991-02-05) column 5, line 18 - line 55 column 5, line 65 -column 6, line 36; figure 3 ---	1-17
A	DE 199 44 164 A (INST VERBUNDWERKSTOFFE GMBH) 8 June 2000 (2000-06-08) column 1, line 63 -column 2, line 22; figure 1 --- -/--	1-17

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

10 June 2003

Date of mailing of the international search report

18/06/2003

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Pierre, N

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 03/00913

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	FR 1 092 605 A (SU D WEST CHEMIE G M B H) 25 April 1955 (1955-04-25) page 1, column 1, line 36 -column 2, line 20; figure F ----	1-17
A	GB 2 098 852 A (ORLITE ENG) 1 December 1982 (1982-12-01) page 1, column 1, line 18 - line 25 page 1, column 2, line 105 -page 2, column 1, line 5 page 2, column 2, line 30 - line 47; figures 1-3 ----	1-17
A	US 2 451 483 A (HUGO GOLDSMITH) 19 October 1948 (1948-10-19) claims 1-3; figure 1 -----	1-17

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 03/00913

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4778638	A	18-10-1988	DE 3736073 A1	05-05-1988
			FR 2606133 A1	06-05-1988
			GB 2196833 A , B	11-05-1988
			IL 83757 A	21-06-1992
			KR 9507642 B1	13-07-1995
			US 4908877 A	20-03-1990
US 4990207	A	05-02-1991	CA 1334160 A1	31-01-1995
			JP 2097048 C	02-10-1996
			JP 8005079 B	24-01-1996
			JP 63247012 A	13-10-1988
			JP 2097049 C	02-10-1996
			JP 8005080 B	24-01-1996
			JP 63267523 A	04-11-1988
DE 19944164	A	08-06-2000	DE 19944164 A1	08-06-2000
FR 1092605	A	25-04-1955	DE 1080770 B	28-04-1960
			NL 88402 C	
GB 2098852	A	01-12-1982	DE 3209108 A1	11-11-1982
			FR 2501851 A1	17-09-1982
			IT 1150298 B	10-12-1986
			ZA 8201195 A	28-12-1983
US 2451483	A	19-10-1948	NONE	